

## Low PIM QN Male to TNC Female Adapter



### PE91712

#### Configuration

- QN Male Connector 1
- TNC Female Connector 2
- 50 Ohm
- Low PIM Design
- Straight Body Geometry

#### Features

- Typical PIM levels of -160 dBc
- Silver Plated Beryllium Copper Contact
- Max of VSWR 1.15:1 at 3GHz, Max of VSWR 1.2:1 at 6GHz

#### Applications

- Allows Connection Between Series
- General Purpose Test
- Low PIM Applications

#### Description

Pasternack's PE91712 QN male to TNC female adapter is part of our full line of RF components available for same-day shipping. Our QN to TNC adapter has a male to female gender configuration in a low PIM design. PE91712 QN male to TNC female adapter operates to 6 GHz. The Pasternack adapter provides a passive intermodulation of -160 dBc typical.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Impedance		50 Ohm		
Passive Intermodulation		-160		dBc
Dielectric Withstanding Voltage (AC)			1,000	Vrms

#### Mechanical Specifications

##### Size

Length	1.38 in [35.05 mm]
Width	0.71 in [18.03 mm]
Height	0.71 in [18.03 mm]
Weight	0.06 lbs [27.22 g]

Description	Connector 1	Connector 2
Type	QN Male	TNC Female
Polarity	Standard	Standard

## Low PIM QN Male to TNC Female Adapter



**PE91712**

### Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	QN Male		TNC Female	
Contact	Beryllium Copper	Silver	Beryllium Copper	Silver
Insulation	PTFE		PTFE	
Outer Conductor			Beryllium Copper	Silver
Body	Brass	Tri-Metal	Brass	Tri-Metal
Coupling Nut	Brass	Tri-Metal		

### Environmental Specifications

#### Temperature

Operating Range -40 to +155 °C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Low PIM QN Male to TNC Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM QN Male to TNC Female Adapter PE91712](#)

URL: <https://www.pasternack.com/low-pim-qn-male-to-tnc-female-adapter-pe91712-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE91712 CAD Drawing

## Low PIM QN Male to TNC Female Adapter

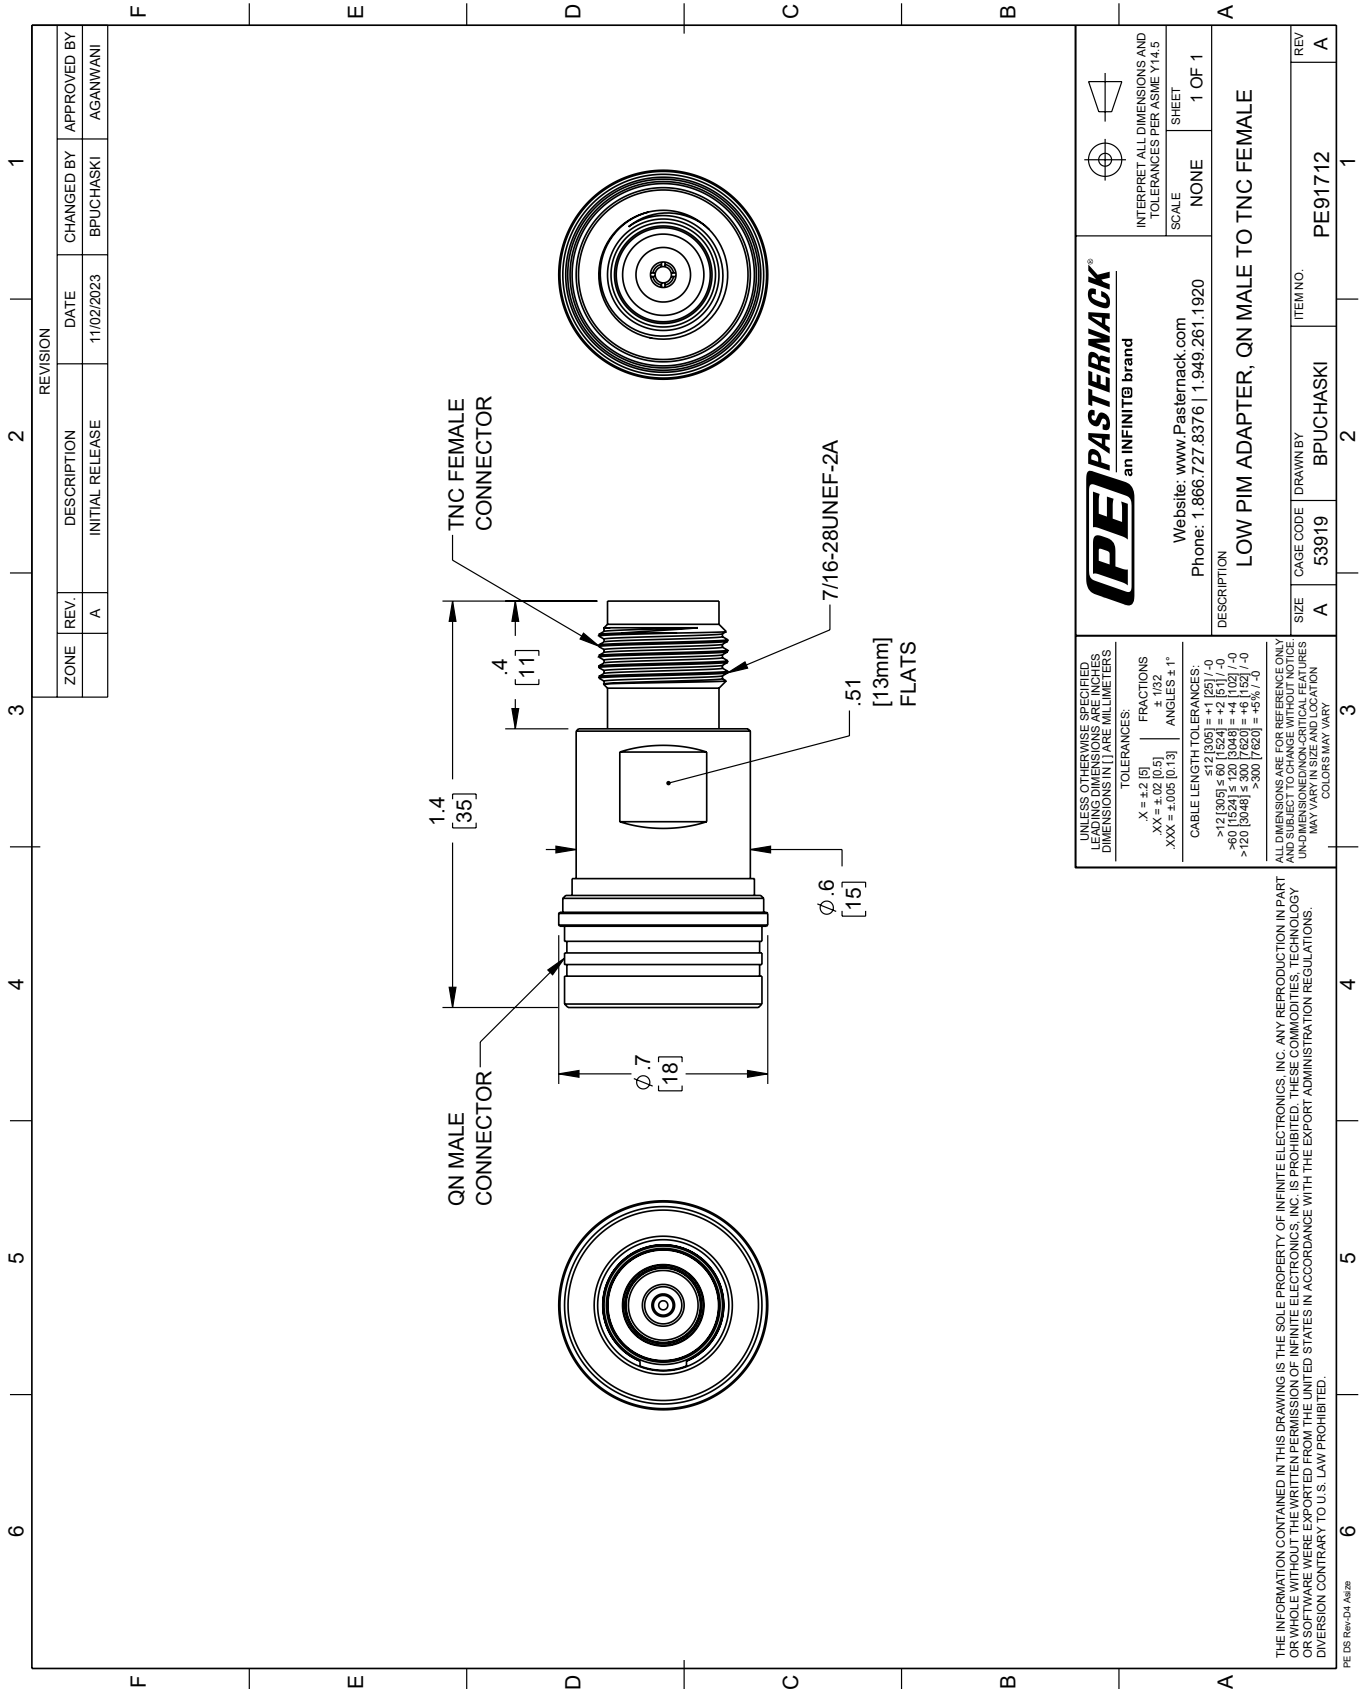

REVISION		DATE	CHANGED BY	APPROVED BY
ZONE	REV.	DESCRIPTION	DATE	11/02/2023
	A	INITIAL RELEASE		BPUCHASKI
				AGANWANI

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5			
Website: <a href="http://www.Pasternack.com">www.Pasternack.com</a> Phone: 1.866.727.8376   1.949.261.1920		SCALE	NONE
DESCRIPTION <b>LOW PIM ADAPTER, QN MALE TO TNC FEMALE</b>		SHEET	1 OF 1
SIZE	A	CAGE CODE	53919
DRAWN BY	BPUCHASKI	ITEM NO.	PE91712
REV	A		

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES AND DIMENSIONS IN [ ] ARE MILLIMETERS.

**TOLERANCES:**  
 .X = +.2 [5]      FRACTIONS ± 1/32  
 .XX = ±.02 [0.5]      ANGLES ± 1°  
 .XXX = ±.005 [0.13]

**CABLE LENGTH TOLERANCES:**  
 <12 [305] ≤ 60 [1524] = +.1 [25] / -0  
 >60 [1524] ≤ 120 [3048] = +.4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +.6 [152] / -0  
 >300 [7620] = +.6 [152] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED/UNCLEAR FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SERVICES ARE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE DS Rev-04 Add2