


**COAXIAL CONNECTOR, BNC, 50 Ohm, Right angle PCB jack (female)**

85\_BNC-50-0-1/133\_N

**Properties**

- Useful for frequently coupled and uncoupled connections
- Available for 50 ohm and 75 ohm applications
- Applicable in frequencies up to 4 GHz

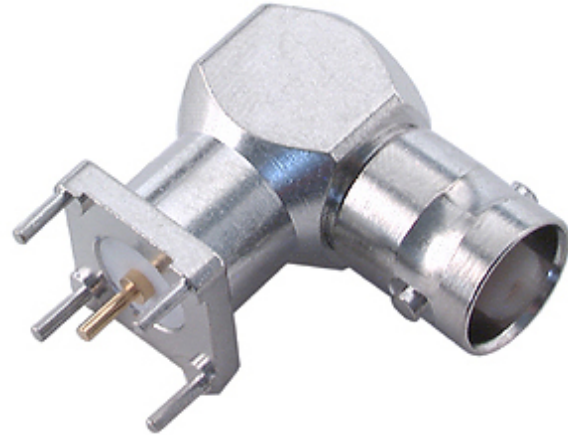

Product configuration		
Interface type	Gender	Standard
BNC	jack	IEC 60169-8_MIL-STD-348A/301_CECC 22120

Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium / Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	

Electrical data	
Impedance	50 $\Omega$
Interface frequency	4 GHz

Mechanical data	
Weight	0.0187 kg
Mating cycles	500
Board mounting type	through holes
Number of printlegs	4
Height above PCB HA	20.5 mm
Height of stand off HS	0.55 mm

Environmental data	
Operation temperature	-65 °C ... 165°C

**COAXIAL CONNECTOR, BNC, 50 Ohm, Right angle PCB jack (female)**

85\_BNC-50-0-1/133\_N

Ordering Information Table		
Item number	Item description	Packaging type
22540736	85_BNC-50-0-1/133_NE	Single

Additional Information	
Remarks	PCB connector with stand-offs

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P1289 / Date of publication: 26.11.2023 / uncontrolled copy