## **SIEMENS**

## **Data sheet**



Mushroom pushbutton, 22 mm, round, plastic, black, 60 mm, momentary contact type, Z=40-unit packaging

nraduat brand name	CIDILIC ACT
product brand name	SIRIUS ACT
product designation	Mushroom pushbuttons
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Plastic, black, 22 mm
Enclosure	
number of command points	1
Actuator	
principle of operation of the actuating element	momentary contact type
product extension optional light source	No
color of the actuating element	black
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	60 mm
number of switching positions	2
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	plastic
color of the front ring	black
General technical data	
product function	
<ul><li>product function</li><li>EMERGENCY OFF function</li></ul>	No
•	No No
EMERGENCY OFF function	
EMERGENCY OFF function     EMERGENCY STOP function	No
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP	No IP66, IP67, IP69(IP69K)
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating	No IP66, IP67, IP69(IP69K)
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating  shock resistance	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating  shock resistance     according to IEC 60068-2-27	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating  shock resistance     according to IEC 60068-2-27     for railway applications according to EN 61373	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating shock resistance     according to IEC 60068-2-27     for railway applications according to EN 61373  vibration resistance	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating  shock resistance     according to IEC 60068-2-27      for railway applications according to EN 61373  vibration resistance     according to IEC 60068-2-6	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B  10 500 Hz: 5g
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating  shock resistance     according to IEC 60068-2-27     for railway applications according to EN 61373  vibration resistance     according to IEC 60068-2-6     for railway applications according to EN 61373	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B  10 500 Hz: 5g Category 1, Class B
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating shock resistance     according to IEC 60068-2-27     for railway applications according to EN 61373  vibration resistance     according to IEC 60068-2-6     for railway applications according to EN 61373  operating frequency maximum	No IP66, IP67, IP69(IP69K)  1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms Category 1, Class B  10 500 Hz: 5g Category 1, Class B 3 600 1/h
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating  shock resistance     according to IEC 60068-2-27     for railway applications according to EN 61373  vibration resistance     according to IEC 60068-2-6     for railway applications according to EN 61373  operating frequency maximum  mechanical service life (operating cycles) typical	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms Category 1, Class B  10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating shock resistance     according to IEC 60068-2-27     for railway applications according to EN 61373  vibration resistance     according to IEC 60068-2-6     for railway applications according to EN 61373  operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms Category 1, Class B  10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000 S
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating shock resistance     according to IEC 60068-2-27     for railway applications according to EN 61373  vibration resistance     according to IEC 60068-2-6     for railway applications according to EN 61373  operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2  Substance Prohibitance (Date)	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms Category 1, Class B  10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000 S
EMERGENCY OFF function     EMERGENCY STOP function  protection class IP  degree of protection NEMA rating shock resistance     according to IEC 60068-2-27     for railway applications according to EN 61373  vibration resistance     according to IEC 60068-2-6     for railway applications according to EN 61373  operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2  Substance Prohibitance (Date)  Ambient conditions	No IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms Category 1, Class B  10 500 Hz: 5g Category 1, Class B 3 600 1/h 10 000 000 S

environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)
Installation/ mounting/ dimensions	
height	60 mm
width	60 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	27.5 mm
installation width	60 mm
installation depth	24.4 mm
Certificates/ approvals	
Further information	

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1000-1CD10-0AA0-Z X90


Cax online generator


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1000-1CD10-0AA0-Z X90

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU1000-1CD10-0AA0-Z X90&lang=en

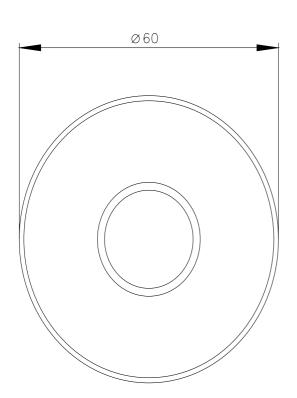

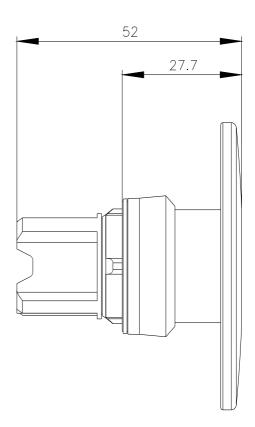

last modified: 1/27/2022 🖸