


# 9422ATCF301

Operating mechanism, flange mounted, variable depth, 30A, 250V, fuseholder, switch mechanism, 6 inch handle, NEMA 4

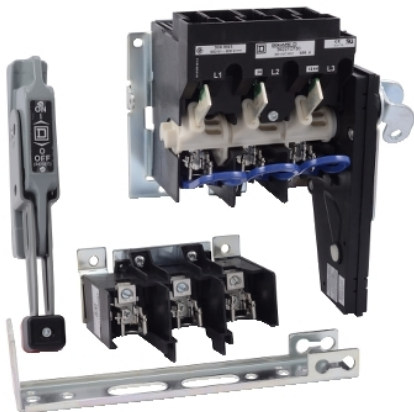

## Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Fusible disconnect switch

## Complementary

Mounting Type	Flange rod variable depth
Current Rating	30 A
Horsepower Rating	7.5 Hp 200 V AC 7.5 Hp 230 V AC 15 Hp 460 V AC 20 Hp 575 V AC 5 hp 250 V DC
Fuse Rating	30 A 250 V
Handle Type	6 in handle included NEMA 1/3/3R/4 enclosures sheet steel
Fuse Type	H K J R

## Environment

Certifications	UL Recognized[RETURN]CSA
----------------	--------------------------

## Ordering and shipping details

Category	US10CP121732
Discount Schedule	OCP1
GTIN	785901872153
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.30 in (18.542 cm)
Package 1 Width	11.30 in (28.702 cm)
Package 1 Length	16.00 in (40.64 cm)
Package 1 Weight	8.80 lb(US) (3.992 kg)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------