

## 16161.2 WE-SUNBLIND-ST

di1	di2	OV	L1	⊕	N		
			230V IN				
			WIELAND GST18/ SCREW (-ST)				
— A1	INTERNAL BUS	WE-SUNBLIND (-ST)			INTERNAL BUS	A1	—C
— A2						A2	—C
— A						A	—C
— B						B	—C
			WIELAND GST18/ SCREW (-ST)				
			230V OUTPUT				
		1	⊕	N	2		

Webeasy I/O blinds control module, 4 digital inputs, 2 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

### Business data

Article number	<u>16161.2</u>
Article name	WE-SUNBLIND-ST
GTIN (EAN)	4044211207687
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	150 g
Weight per piece (including packaging)	190 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

## 16161.2 WE-SUNBLIND-ST

### Technical data

#### BUS data

Bus-Topologie / Kabellänge max.	multidrop line / 500m
Datenübertragungsrate / Bus-Teilnehmer max.	19k2 bps / 64
Bus protocol / interface	Modbus RTU / RS485, halb duplex, nicht isoliert

#### Dimensions

Length	95 mm
Width	71 mm
Height	60 mm

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	6 mm
Torque	0.4 Nm


#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Media

---

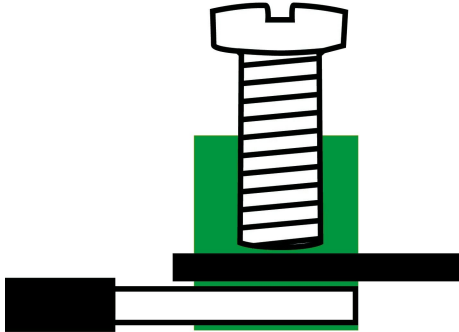

---

### Accessories

---