



Fuseless motor starter Reversing operation 600VAC Size S0 0.9-1.25A 24V DC screw connection For snapping onto 60 mm busbar systems Type of coordination 2 IQ = 150 kA Also full fills type Of coordination 1 1NO+1NC (per contactor)

| | |
|---|--|
| product brand name | SIRIUS |
| product designation | non-fused motor starter 3RA2 |
| design of the product | reversing starter |
| manufacturer's article number | |
| <ul style="list-style-type: none"> of the supplied contactor of the supplied circuit-breakers of the supplied RS assembly kit of the supplied busbar adapter of the supplied link module | 3RT2023-1BB40 3RV2011-0KA10 3RA2923-1DB1 8US1251-5NT10 3RA2921-1BA00 |
| General technical data | |
| size of the circuit-breaker | S00 |
| size of load feeder | S0 |
| product extension auxiliary switch | Yes |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| degree of pollution | 3 |
| surge voltage resistance rated value | 6 kV |
| shock resistance according to IEC 60068-2-27 | 6g / 11 ms |
| mechanical service life (operating cycles) of contactor typical | 10 000 000 |
| type of assignment | 2 |
| Ambient conditions | |
| ambient temperature | |
| <ul style="list-style-type: none"> during operation during storage during transport | -20 ... +60 °C -50 ... +80 °C -55 ... +80 °C |
| Main circuit | |
| number of poles for main current circuit | 3 |
| design of the switching contact | electromechanical |
| adjustable current response value current of the current-dependent overload release | 0.9 ... 1.25 A |
| operating voltage | |
| <ul style="list-style-type: none"> rated value at AC-3 rated value maximum | 690 V 690 V |
| operating frequency rated value | 50 ... 60 Hz |
| operational current at AC-3 at 400 V rated value | 1.1 A |
| operating power at AC-3 | |
| <ul style="list-style-type: none"> at 400 V rated value at 500 V rated value at 690 V rated value | 370 W 550 W 750 W |
| Control circuit/ Control | |
| control supply voltage at DC | |

| | | | |
|--|--|---------------------------|-------|
| • rated value | 24 V | | |
| holding power of magnet coil at DC | 5.9 W | | |
| Auxiliary circuit | | | |
| number of NC contacts for auxiliary contacts | 2 | | |
| number of NO contacts for auxiliary contacts | 2 | | |
| Protective and monitoring functions | | | |
| trip class | CLASS 10 | | |
| design of the overload release | thermal (bimetallic) | | |
| response value current of instantaneous short-circuit trip unit | 16.25 A | | |
| UL/CSA ratings | | | |
| full-load current (FLA) for 3-phase AC motor | | | |
| • at 480 V rated value | 1.19 A | | |
| • at 600 V rated value | 1.25 A | | |
| yielded mechanical performance [hp] | | | |
| • for 3-phase AC motor | | | |
| — at 460/480 V rated value | 0.5 hp | | |
| — at 575/600 V rated value | 0.5 hp | | |
| Short-circuit protection | | | |
| product function short circuit protection | Yes | | |
| design of the short-circuit trip | magnetic | | |
| conditional short-circuit current (I _q) | | | |
| • at 400 V according to IEC 60947-4-1 rated value | 153 000 A | | |
| Installation/ mounting/ dimensions | | | |
| mounting position | vertical | | |
| fastening method | for snapping onto 60 mm busbar systems | | |
| height | 260 mm | | |
| width | 90 mm | | |
| depth | 165 mm | | |
| required spacing | | | |
| • for grounded parts | | | |
| — forwards | 10 mm | | |
| — backwards | 0 mm | | |
| — upwards | 30 mm | | |
| — at the side | 9 mm | | |
| — downwards | 10 mm | | |
| • for live parts | | | |
| — forwards | 10 mm | | |
| — backwards | 0 mm | | |
| — upwards | 30 mm | | |
| — downwards | 10 mm | | |
| — at the side | 9 mm | | |
| Connections/ Terminals | | | |
| type of electrical connection for main current circuit | screw-type terminals | | |
| type of connectable conductor cross-sections for main contacts stranded | 1 ... 10 mm², 2x (2.5 ... 6 mm²) | | |
| connectable conductor cross-section for main contacts finely stranded with core end processing | 1 ... 6 mm² | | |
| Safety related data | | | |
| B10 value with high demand rate according to SN 31920 | 1 000 000 | | |
| proportion of dangerous failures with high demand rate according to SN 31920 | 73 % | | |
| protection class IP on the front according to IEC 60529 | IP20 | | |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front | | |
| Certificates/ approvals | | | |
| General Product Approval | For use in hazardous locations | Declaration of Conformity | other |

[Confirmation](#)



[Confirmation](#)

[Transport Information](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2220-0KD23-0BB4>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2220-0KD23-0BB4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0KD23-0BB4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2220-0KD23-0BB4&lang=en



Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0KD23-0BB4/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2220-0KD23-0BB4&objecttype=14&gridview=view1>

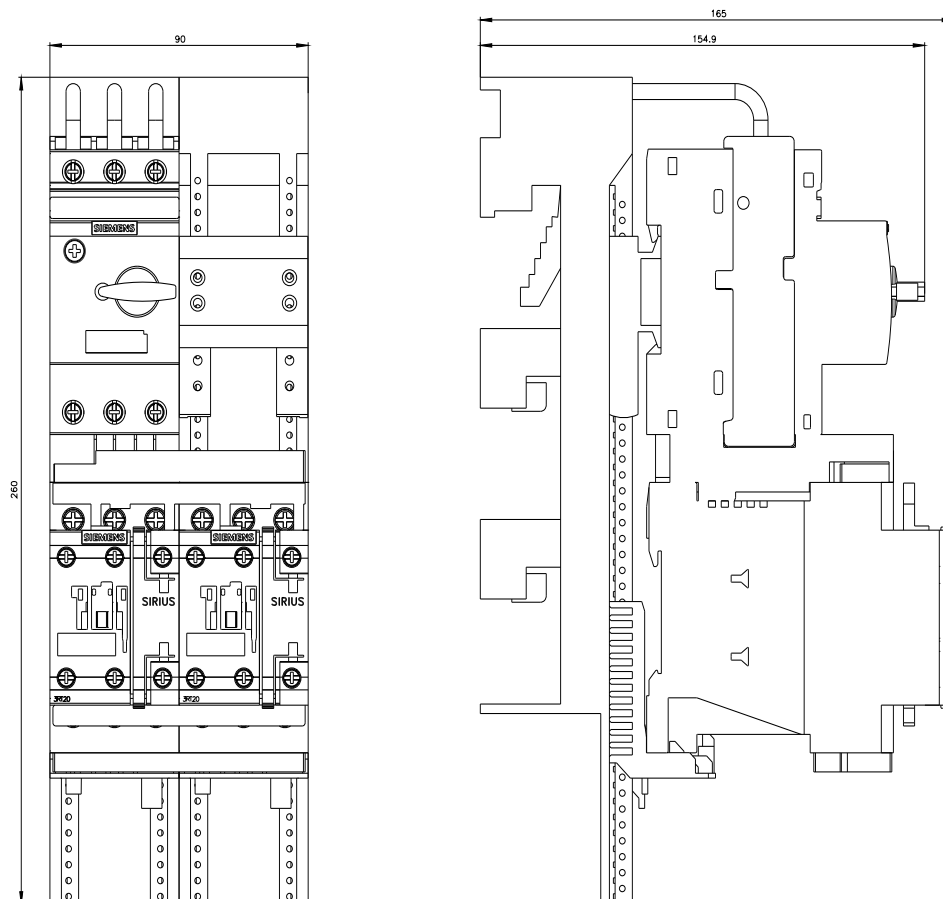

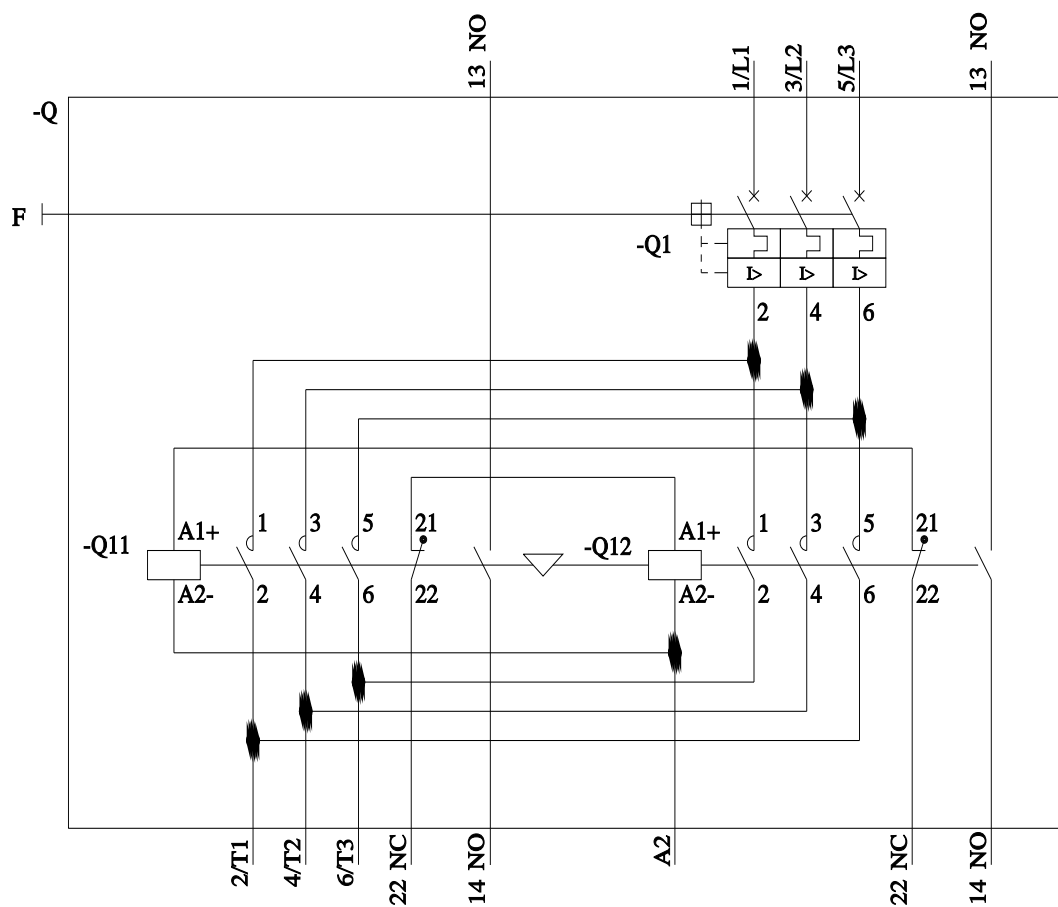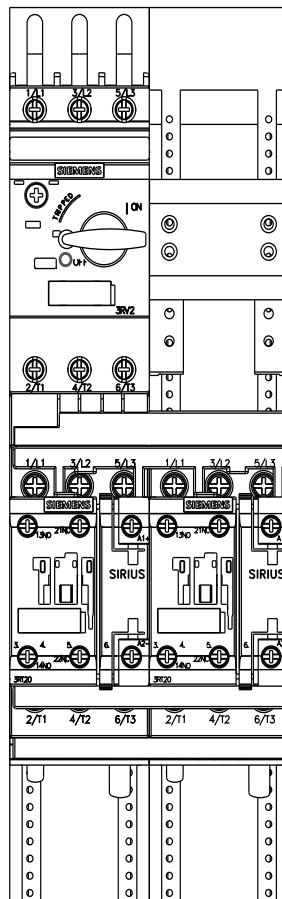

last modified:

12/15/2020