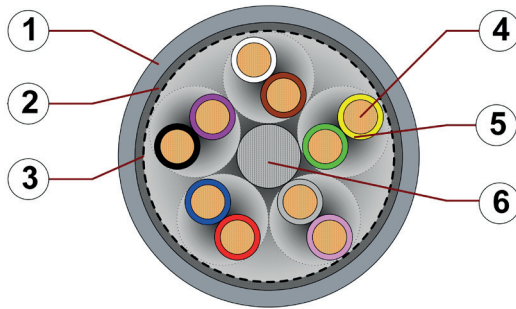


# Data sheet

## chainflex® CF211.PUR



Data cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded  
● twisted pair ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant



**Example image**  
For detailed overview please see design table

### Cable structure

	<b>Conductor</b>	Very finely stranded special conductors of particularly bending resistant design made of bare copper wires.
	<b>Core insulation</b>	Mechanically high-quality TPE mixture.
	<b>Core structure</b>	Cores twisted in pairs with a short pitch length, core pairs then wound with short pitch lengths.
	<b>Core identification</b>	Colour code in accordance with DIN 47100
	<b>Intermediate layer</b>	Foil taping over the outer layer.
	<b>Overall shield</b>	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 70 % linear, approx. 90 % optical
	<b>Outer jacket</b>	Low-adhesion, halogen-free, highly abrasion resistant PUR mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-10-2). <b>Colour:</b> Window-grey (similar to RAL 7040) <b>Printing:</b> black

„00000 m“\* igus chainflex CF211.PUR.---.02① -----② E310776 cЯUus

AWM Style 20233 VW-1 AWM I/II A/B 80°C 300V FT1 DNV-GL 13 656-14 HH

EAC/CTP CE UKCA RoHS-II conform www.igus.de +++ chainflex cable works +++

\* **Length printing:** Not calibrated. Only intended as an orientation aid.

① / ② Cable identification according to Part No. (see technical table).

Example: ... chainflex **CF211.PUR.02.04.02 (4x(2x0.25))C E310776** ...



igus 36-month  
chainflex cable  
guarantee and  
service life  
calculator based  
on 2 billion test  
cycles per year



Example image






# Data sheet

## chainflex® CF211.PUR



Data cable (Class 5.5.3.1) • For heavy duty applications • PUR outer jacket • Shielded • twisted pair • Oil resistant and coolant-resistant • Flame retardant • PVC and halogen-free • Notch-resistant • Hydrolysis and microbe-resistant

### Dynamic information

	<b>Bend radius</b>	<b>e-chain® linear</b> <b>flexible</b> <b>fixed</b>	minimum 7.5 x d minimum 6 x d minimum 4 x d
	<b>Temperature</b>	<b>e-chain® linear</b> <b>flexible</b> <b>fixed</b>	-25 °C up to +80 °C -40 °C up to +80 °C (following DIN EN 60811-504) -50 °C up to +80 °C (following DIN EN 50305)
	<b>v max.</b>	<b>unsupported</b> <b>gliding</b>	5 m/s 3 m/s
	<b>a max.</b>		50 m/s <sup>2</sup>
	<b>Travel distance</b>		Unsupported travels and up to 100 m for gliding applications, Class 5

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.



### Guaranteed service life according to guarantee conditions

Double strokes	5 million	7.5 million	10 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
-25/-15	10	11	12
-15/+70	7.5	8.5	9.5
+70/+80	10	11	12

Minimum guaranteed service life of the cable under the specified conditions.

The installation of the cable is recommended within the middle temperature range.

### Electrical information

	<b>Nominal voltage</b>	300/300 V (following DIN VDE 0298-3) 300 V (following UL)
	<b>Testing voltage</b>	1500 V (following DIN EN 50395)



Example image

igus® chainflex® CF211.PUR

# Data sheet

## chainflex® CF211.PUR



Data cable (Class 5.5.3.1) • For heavy duty applications • PUR outer jacket • Shielded  
• twisted pair • Oil resistant and coolant-resistant • Flame retardant • PVC and halogen-free • Notch-resistant • Hydrolysis and microbe-resistant

### Properties and approvals

	UV resistance	Medium
	Oil resistance	Oil-resistant (following DIN EN 50363-10-2), Class 3
	Offshore	MUD-resistant following NEK 606 - status 2009
	Flame retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2 / Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	Halogen-free	Following DIN EN 60754
	PFAS-free	Use of PFAS-free materials according to the content of the REACH directive and its rules for the production and processing of chemical substances
	UL verified	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
	UL/CSA AWM	See table UL/CSA AWM details
	NFPA	Following NFPA 79-2018, chapter 12.9
	DNV	Type Approval Certificate TAE00003X3
	EAC	Certificate No. RU C-DE.ME77.B.00295/19
	REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
	Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 1. The outer jacket material of this series complies with CF77. UL.05.12.D - tested by IPA according to standard DIN EN ISO 14644-1
	CE	Following 2014/35/EU



### Properties and approvals

#### UL/CSA AWM Details

Conductor nominal cross section [mm²]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
0.25	2-28	10493	20233	300	80
0.34	6-16	10493	20233	300	80
0.5	2-28	10493	20233	300	80

Example image

igus® chainflex® CF211.PUR

# Data sheet

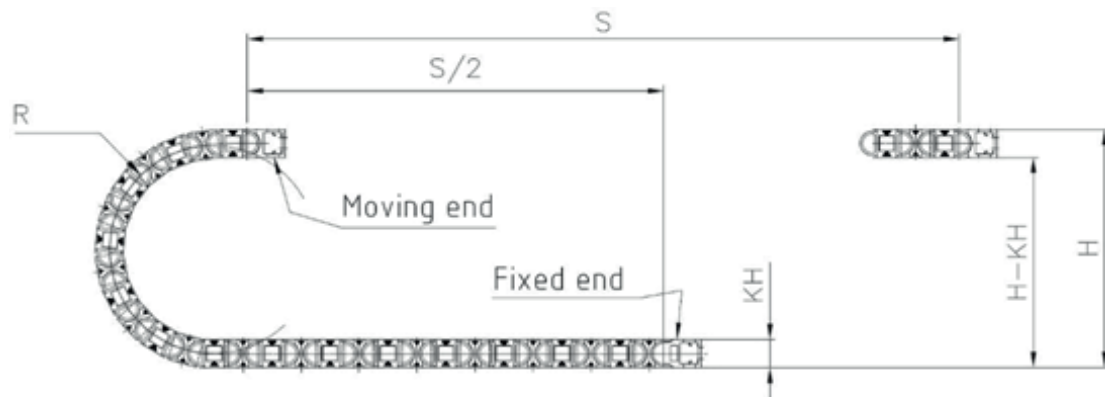
## chainflex® CF211.PUR



Data cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● twisted pair ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

### Typical lab test setup for this cable series

Test bend radius R	approx. 35 - 75 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s <sup>2</sup>



### Typical application areas

- For heavy duty applications, Class 5
- Unsupported travel distances and up to 100 m for gliding applications, Class 5
- Almost unlimited resistance to oil, Class 3
- No torsion, Class 1
- Indoor and outdoor applications with average sun radiation
- Machining units/machine tools, Storage and retrieval units for high-bay warehouses, Packaging industry, quick handling, refrigerating sector



# Data sheet

## chainflex® CF211.PUR



Data cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded  
● twisted pair ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

### Technical tables:

#### Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF211.PUR.02.01.02	(2x0.25)C	5.0	18	32
CF211.PUR.02.02.02 <sup>2)</sup>	(2x(2x0.25))C	6.5	25	49
CF211.PUR.02.03.02	(3x(2x0.25))C	7.0	36	65
CF211.PUR.02.04.02	(4x(2x0.25))C	7.5	44	76
CF211.PUR.02.05.02	(5x(2x0.25))C	8.5	52	89
CF211.PUR.02.06.02	(6x(2x0.25))C	9.0	62	102
CF211.PUR.02.08.02	(8x(2x0.25))C	10.5	78	130
CF211.PUR.02.10.02	(10x(2x0.25))C	12.0	90	168
CF211.PUR.02.14.02	(14x(2x0.25))C	12.0	119	204
CF211.PUR.03.03.02	(3x(2x0.34))C	8.0	44	83
CF211.PUR.03.06.02	(6x(2x0.34))C	10.0	63	119
CF211.PUR.03.08.02	(8x(2x0.34))C	12.0	95	163
CF211.PUR.05.01.02	(2x0.5)C	6.0	26	51
CF211.PUR.05.02.02 <sup>2)</sup>	(2x(2x0.5))C	8.5	41	86
CF211.PUR.05.03.02	(3x(2x0.5))C	9.0	61	105
CF211.PUR.05.04.02	(4x(2x0.5))C	9.5	74	123
CF211.PUR.05.05.02	(5x(2x0.5))C	11.0	91	152
CF211.PUR.05.06.02	(6x(2x0.5))C	11.5	103	189
CF211.PUR.05.08.02	(8x(2x0.5))C	13.0	137	221
CF211.PUR.05.10.02	(10x(2x0.5))C	15.5	170	297
CF211.PUR.05.14.02	(14x(2x0.5))C	15.5	185	311

<sup>2)</sup> The chainflex® types marked with 2) are cables designed as a star-quad.

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.  
G = with green-yellow earth core x = without earth core

#### Electrical information

Conductor nominal cross section [mm²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Max. current rating at 30 °C [A]
0.25	79	5
0.34	57	7
0.5	39	10

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



# Data sheet

## chainflex® CF211.PUR



Data cable (Class 5.5.3.1) • For heavy duty applications • PUR outer jacket • Shielded  
• twisted pair • Oil resistant and coolant-resistant • Flame retardant • PVC and halogen-free • Notch-resistant • Hydrolysis and microbe-resistant

### Design table

Part No.	Number of Core design cores		Part No.	Number of Core design cores	
CF211.PUR.XX.01.02	2		CF211.PUR.XX.06.02	6x2	
CF211.PUR.XX.02.02	4		CF211.PUR.XX.08.02	8x2	
CF211.PUR.XX.03.02	3x2		CF211.PUR.XX.10.02	10x2	
CF211.PUR.XX.04.02	4x2		CF211.PUR.XX.14.02	14x2	
CF211.PUR.XX.05.02	5x2				



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image



# Data sheet

## chainflex® CF211.PUR



Data cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded  
● twisted pair ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

### Colour code in accordance with DIN 47100

Conductor no.	Colours according to DIN ISO 47100
1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red
9	black
10	violet
11	grey-pink
12	red-blue
13	white-green
14	brown-green
15	white-yellow
16	yellow-brown
17	white-grey
18	grey-brown

Conductor no.	Colours according to DIN ISO 47100
19	white-pink
20	pink-brown
21	white-blue
22	brown-blue
23	white-red
24	brown-red
25	white-black
26	brown-black
27	grey-green
28	yellow-grey
29	pink-green
30	yellow-pink
31	green-blue
32	yellow-blue
33	green-red
34	yellow-red
35	green-black
36	yellow-black



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image