

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 4
 Gauge: 26 0.14 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 7$
 Resistance at 20 °C: 150 Ω /km max

Insulator

Material: PVC
 Color: yellow, white, black, red
 Diameter: $\varnothing 1.1 \pm 0.10$ mm
 Nominal thickness: 0.29 mm
 Resistance at 20 °C: 10 M Ω /km min



Outer jacket

Material: PVC
 Color: white
 Diameter: $\varnothing 4.25 \pm 0.20$ mm
 Nominal thickness: 0.80 mm

Wire marking: E339579 UL AWM STYLE 2464 26 80°C
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 LF TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking

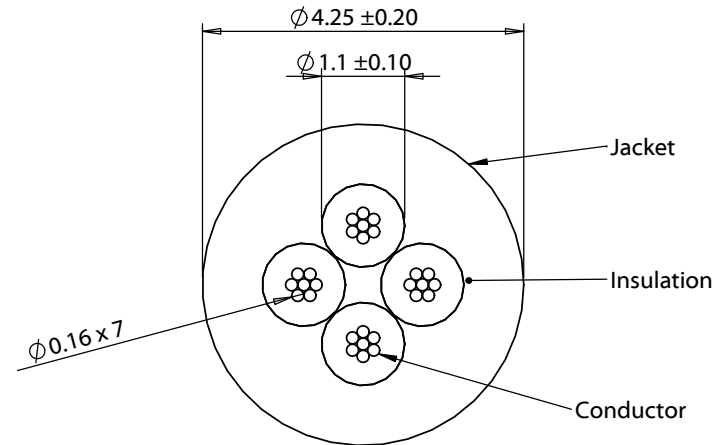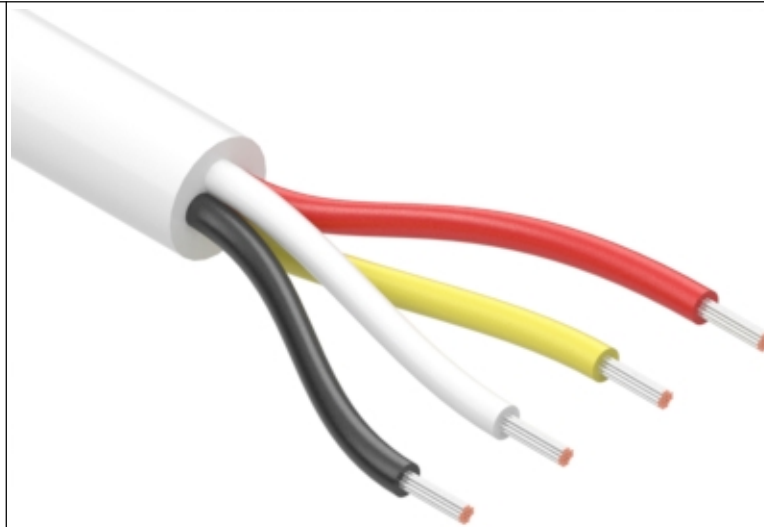

| | | | | | |
|-----------|------------|---------------------------------------|--|---|---|
| Revision: | Date: | Description: | Prepared: | Notes: | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 06/26/2014 | Initial release | Verified: | RoHS and REACH compliant Function test: no open, no short circuit, no intermittent | |
| A1 | 09/05/2018 | Increased operating temperature range | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: | Size: Part number: |
| | | | | Wire, 4C TS, 26 AWG, UL2464, 300V, 80C, 4.25 mm, VW-1, PVC, white | A 30-00393 |
| | | | | Scale: 10:1 | |

5

4

3

2

1