

AXL P DI16 NAM 1F - Digital module



1052416

<https://www.phoenixcontact.com/us/products/1052416>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline P, Digital input module, Digital inputs: 16 (NAMUR), 8 V DC, connection technology: 2-conductor, NAMUR functionality, transmission speed in the local bus: 100 Mbps, degree of protection: IP20, including bus base module and Axioline P connectors

Product description

The module is an Axioline P I/O module for use in the Axioline P modular I/O system. It is used to acquire digital signals. The module is a modular I/O device that can be affixed to the Axioline P local bus, to communicate I/O data up to the Axioline P bus coupler, which forms the head of the station. The digital input module with NAMUR capabilities collects digital input signals and supports NAMUR proximity and close contact switches and makes this information available to the bus coupler through the Axioline P local bus. The module is fully hot-swappable and may be removed while under power.

Your advantages

- 16 NAMUR digital input signals for NAMUR proximity sensors according to EN 60947-5-6
- Open circuit contacts
- Switch contacts with resistance circuit in accordance with IEC/EN 60947-5-6
- Connection of sensors in 2-conductor technology
- Can be used under extreme ambient conditions
- Temperature range: -40 °C ... +70 °C
- Hot-swappable

Commercial data

Item number	1052416
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR06
Product key	DRIP31
GTIN	4055626676623
Weight per piece (including packing)	380 g
Weight per piece (excluding packing)	276 g
Customs tariff number	85389099
Country of origin	US


AXL P DI16 NAM 1F - Digital module



1052416
<https://www.phoenixcontact.com/us/products/1052416>

Technical data

Dimensions

Dimensional drawing	
Width	53.6 mm
Height	126.1 mm
Depth	77.14 mm
Note on dimensions	The depth applies when a TH 35-7.5 DIN rail is used (in accordance with EN 60715).

Notes

Utilization restriction	
EMC note	EMC: class A product, see manufacturer's declaration in the download area
Utilization restriction	
CCCex note	Use in potentially explosive areas is not permitted in China.

Interfaces

Axioline P local bus	
Connection method	Connection for bus base module
Transmission speed	100 Mbps

Input data

Digital:	
Input name	Digital inputs
Description of the input	NAMUR enabled digital input signals
Number of inputs	16 (NAMUR)
Connection method	Push-in connection
Connection technology	2-conductor
Nominal input voltage U_{IN}	8.2 V DC
Protective circuit	Polarity reversal protection of the inputs

Product properties

Product type	I/O component
Product family	Axioline P
Type	block modular

AXL P DI16 NAM 1F - Digital module



1052416

<https://www.phoenixcontact.com/us/products/1052416>

Mounting position	any (no temperature derating)
Scope of delivery	including bus base module and Axioline P connectors
Special properties	NAMUR functionality

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Potentials: Supply voltage (U_L)

Supply voltage	24 V DC (via bus base module)
Supply voltage range	19.2 V DC ... 30 V DC
Current draw	max. 130 mA (via bus base module)

Potentials: Axioline P local bus supply (U_{BUS})

Supply voltage	5 V DC (via bus base module)
Current draw	max. 135 mA

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply of the local bus (U_{BUS}) / functional ground	500 V AC, 62 Hz, 1 min.
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 62 Hz, 1 min.
Test voltage: Field to functional earth	500 V AC, 62 Hz, 1 min.
Test voltage: Field to 5 V and 24 V supplies	1500 V AC, 62 Hz, 1 min.

Connection data

Connection technology

Connection name	Axioline P connector
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline P: system and installation" user manual.

Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Axioline P connector

Connection method	Push-in connection
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline P: system and installation" user manual.
Conductor cross section, rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

AXL P DI16 NAM 1F - Digital module



1052416

<https://www.phoenixcontact.com/us/products/1052416>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C (Standard)
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 2000 m above sea level)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Approvals

ATEX

Identification	II 3G Ex ec IIC T4 Gc
Certificate	DEMKO 20 ATEX 2334X

IECEX

Identification	Ex ec IIC T4 Gc
Certificate	IECEX UL 20.0002X

UKCA Ex (UKEX)

Identification	II 3G Ex ec IIC T4 Gc
Certificate	PxCAI22UKEx1052416X

Ex data

UL, USA / Canada	Class I, Div. 2, Groups A, B, C, D T4 Class I, Zone 2, IIC T4
------------------	--

Mounting

Mounting type	DIN rail mounting
Mounting position	any (no temperature derating)

AXL P DI16 NAM 1F - Digital module





1052416

<https://www.phoenixcontact.com/us/products/1052416>

Drawings

Dimensional drawing

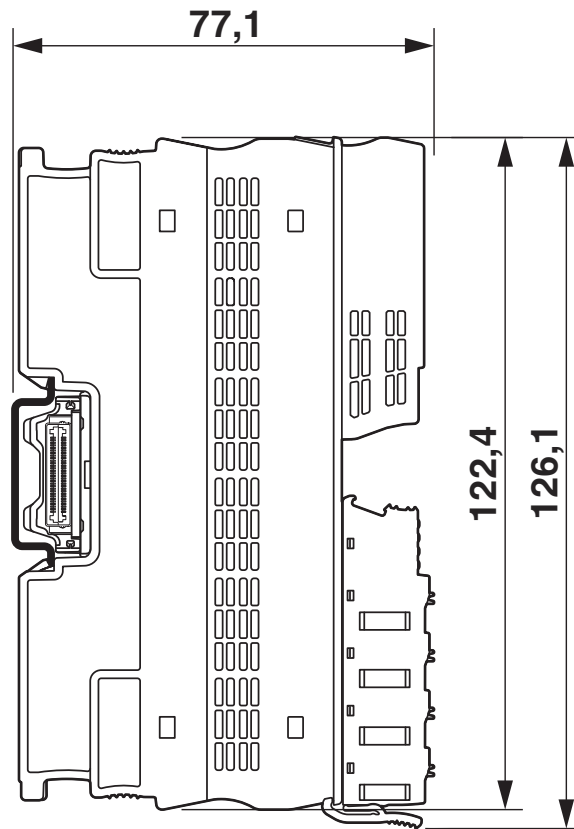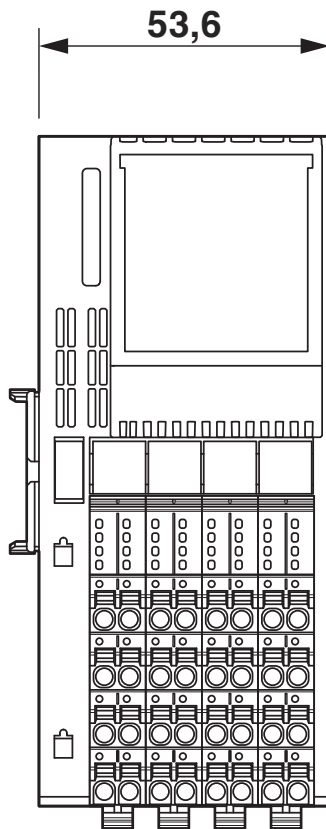

Dimensional drawing

AXL P DI16 NAM 1F - Digital module



1052416

<https://www.phoenixcontact.com/us/products/1052416>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1052416>



UL Listed
Approval ID: File E238705



cUL Listed
Approval ID: E238705



IECEX
Approval ID: IECEX UL 20.0002X



cUL Listed
Approval ID: FILE E196811



UL Listed
Approval ID: FILE E196811



ATEX
Approval ID: DEMKO 20 ATEX 2334X



CCC
Approval ID: 2021122309114878



CCC
Approval ID: 2021122309114878

cULus Listed

cULus Listed

AXL P DI16 NAM 1F - Digital module



1052416

<https://www.phoenixcontact.com/us/products/1052416>

Classifications

ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

ETIM

ETIM 9.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

AXL P DI16 NAM 1F - Digital module

1052416

<https://www.phoenixcontact.com/us/products/1052416>



Accessories

AXL P BS F2 - Bus connector

1052428

<https://www.phoenixcontact.com/us/products/1052428>

Axioline P bus base module for housing type F2




AXL SHIELD SET - Shield connection

2700518

<https://www.phoenixcontact.com/us/products/2700518>

Axioline shield connection set (contains 2 shield bus holders and 2 SK 5 shield connection clamps)



AXL P DI16 NAM 1F - Digital module

1052416

<https://www.phoenixcontact.com/us/products/1052416>



ZB 20,3 AXL UNPRINTED - Zack marker strip

0829579

<https://www.phoenixcontact.com/us/products/0829579>



Zack marker strip for Axioline F (device labeling), in 2 x 20.3 mm pitch, unprinted, 25-section, for individual labeling with B-STIFT 0.8, X-PEN, or CMS-P1-PLOTTER

AXL P TERM PAIR - Terminal block

2316402

<https://www.phoenixcontact.com/us/products/2316402>



Axioline P terminator pair

AXL P DI16 NAM 1F - Digital module

1052416

<https://www.phoenixcontact.com/us/products/1052416>



AXL P TERM PAIR - Terminal block

2316402

<https://www.phoenixcontact.com/us/products/2316402>



Axioline P terminator pair

AXL P BS F2 - Bus connector

1052428

<https://www.phoenixcontact.com/us/products/1052428>



Axioline P bus base module for housing type F2

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com