


6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A,B	2078410006	RECEPTACLE HOUSING FOR L1NK 250 - 1X6 Ck		2	PC
C	466261305	CRIMP TERMINAL FOR L1NK 250 - 22-24 AWG		12	PC
D	--	WHITE PART ID LABEL		1	PC

2		1	
FROM	TO	DESCRIPTION	COLOUR
A1	B1	1X22AWG DISC PVC BK UL1569	BLACK
A2	B2	1X22AWG DISC PVC BK UL1569	BLACK
A3	B3	1X22AWG DISC PVC BK UL1569	BLACK
A4	B4	1X22AWG DISC PVC BK UL1569	BLACK
A5	B5	1X22AWG DISC PVC BK UL1569	BLACK
A6	B6	1X22AWG DISC PVC BK UL1569	BLACK

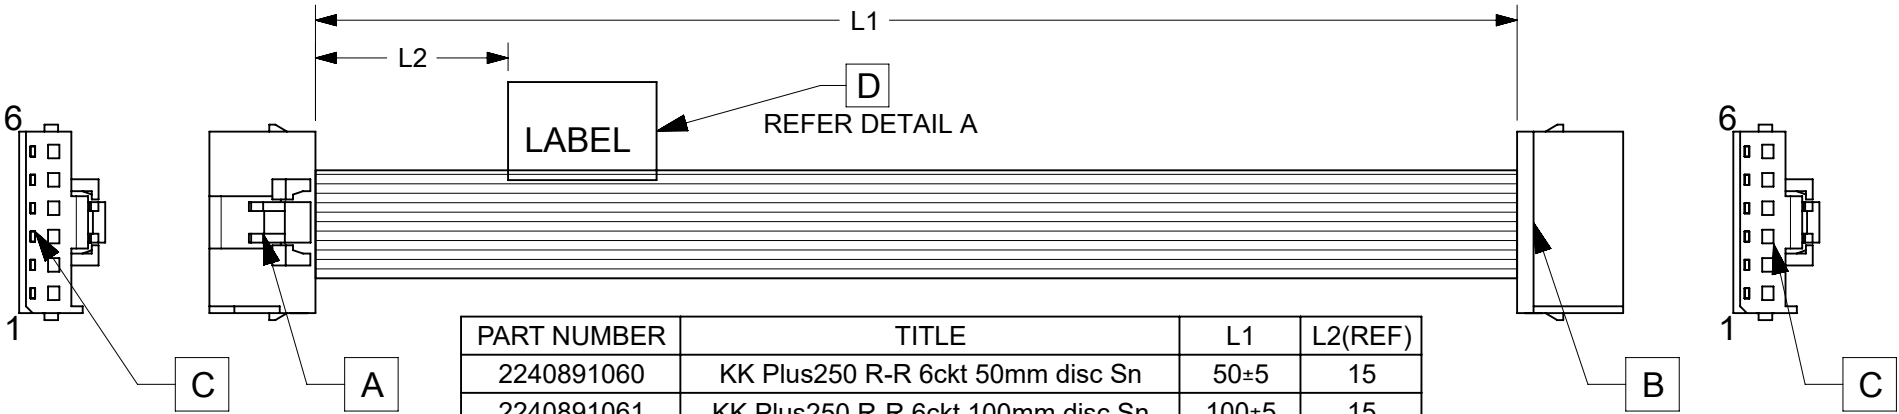

PART NUMBER	TITLE	L1	L2(REF)
2240891060	KK Plus250 R-R 6ckt 50mm disc Sn	50±5	15
2240891061	KK Plus250 R-R 6ckt 100mm disc Sn	100±5	15
2240891062	KK Plus250 R-R 6ckt 150mm disc Sn	150±5	15
2240891063	KK Plus250 R-R 6ckt 300mm disc Sn	300±5	15
2240891064	KK Plus250 R-R 6ckt 600mm disc Sn	600±5	15

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

NOTES

1. CABLE ASSEMBLY TO BE TESTED 100% FOR CONTINUITY AND POLARITY.
2. CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
- 3.LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
- 4.LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
02/22/2023	B	INITIAL RELEASE	THANUB
RELEASE STATUS		P1	RELEASE DATE
			2023/03/23 11:04:43

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
$\frac{F}{A} = 0$		DIMENSION UNITS	SCALE
$\frac{F}{E} = 0$		mm	NTS
$\frac{F}{P} = 0$		GENERAL TOLERANCES (UNLESS SPECIFIED)	
		ANGULAR TOL ± °	
		4 PLACES	±
		3 PLACES	±
		2 PLACES	±
		1 PLACE	±
		0 PLACES	±
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	
		THIRD ANGLE PROJECTION	DRAWING
			A4-SIZE
		SERIES	224089
		MATERIAL NUMBER	SEE TABLE
		CUSTOMER	GENERAL MARKET
		SHEET NUMBER	1 OF 1