




TE Internal #: 9-2367346-1
Single Wire Seal (SWS), Silicone Rubber, Orange, 2.55 - 2.75 in [6.5 - 7 mm] Insulation Diameter, 2 Position
[View on TE.com >](#)

Connectors > Connector Accessories > Connector Seals & Cavity Plugs

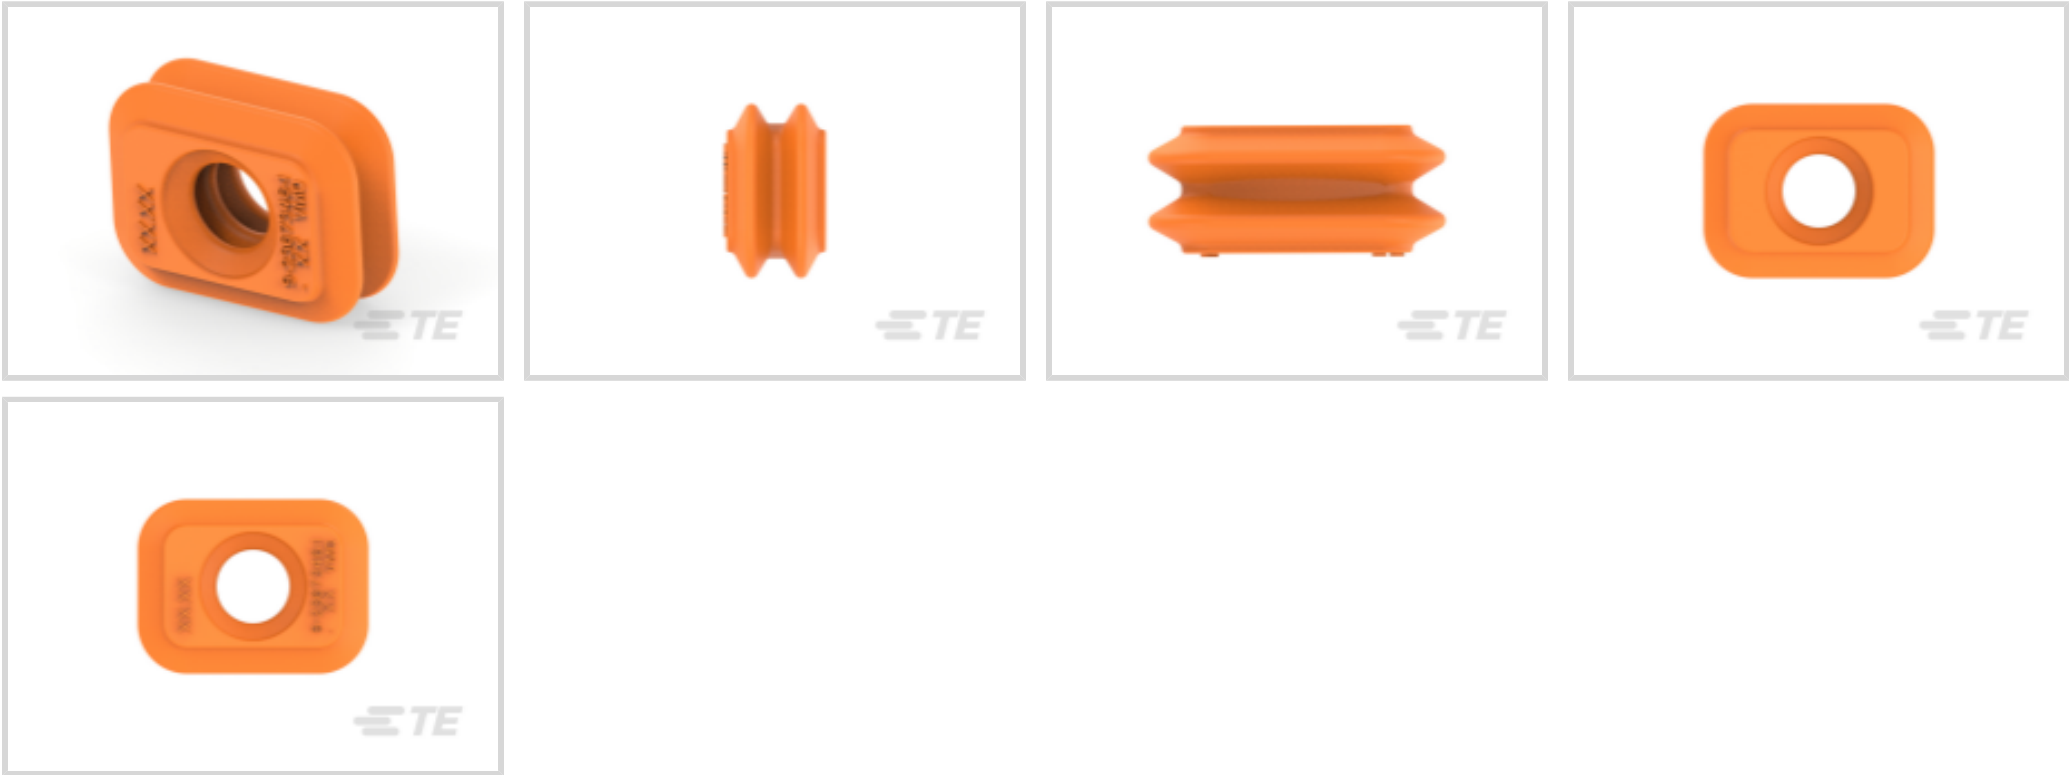

Connector Seal & Plug Type: **Single Wire Seal (SWS)**
Primary Product Material: **Silicone Rubber**
Primary Product Color: **Orange**
Compatible Insulation Diameter Range: **6.5 - 7 mm [2.55 - 2.75 in]**
Resistance to Hydrocarbons: **Excellent**

Features

Product Type Features

Connector Seal & Plug Type	Single Wire Seal (SWS)
----------------------------	------------------------

Configuration Features

Number of Positions	2
---------------------	---

Body Features

Primary Product Material	Silicone Rubber
Primary Product Color	Orange

Housing Features

Centerline (Pitch)	4 mm[.15 in]
--------------------	--------------

Dimensions

Compatible Insulation Diameter Range	6.5 - 7 mm[2.55 - 2.75 in]
--------------------------------------	----------------------------

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]

Other



Resistance to Hydrocarbons	Excellent
Shore A Hardness	25 - 35
Contains Lubricant	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



 <p>TE Part # 9-2367337-1 2POS,CSS SIZE 20,SOC OUTER HSG ASSY,SLD</p>	 <p>TE Part # 9-2367337-2 2POS,CSS SIZE 20,SOC OUTER HSG ASSY,SLD</p>	 <p>TE Part # 9-2367337-3 2POS,CSS SIZE 20,SOC OUTER HSG ASSY,SLD</p>	 <p>TE Part # 9-2367337-4 2POS,CSS SIZE 20,SOC OUTER HSG ASSY,SLD</p>
 <p>TE Part # 9-2367341-1 2POS,CSS SIZE 20,PIN OUTER HSG ASSY</p>	 <p>TE Part # 9-2367341-2 2POS,CSS SIZE 20,PIN OUTER HSG ASSY</p>	 <p>TE Part # 9-2367341-3 2POS,CSS SIZE 20,PIN OUTER HSG ASSY</p>	 <p>TE Part # 9-2367341-4 2POS,CSS SIZE 20,PIN OUTER HSG ASSY</p>
 <p>TE Part # 9-2367344-1 PIN CONN CVR,2POS,CSS SIZE 20,180 DEG</p>	 <p>TE Part # 9-2367345-1 SOC CONN CVR ASSY,2POS,CSS SIZE 20,180</p>	 <p>TE Part # 9-2367346-2 SWS,HSD,CVTY DIA,RECTANGULAR</p>	 <p>TE Part # 9-2383999-1 4POS,DIA 1MM,PIN HSG ASSY,SLD</p>

Customers Also Bought

 <p>TE Part # 776523-4 AMPSEAL 16 Housings</p>	 <p>TE Part # DT06-08SA-CE06 PLG, 8P, GRY, E, SEAL RET, A</p>	 <p>TE Part # 2600046-1 18CCT RECEP BLACK KEYING A W /SEAL</p>	 <p>TE Part # 9-2367337-1 2POS,CSS SIZE 20,SOC OUTER HSG ASSY,SLD</p>
 <p>TE Part # 9-2367345-1 SOC CONN CVR ASSY,2POS,CSS SIZE 20,180</p>	 <p>TE Part # 9-2370624-1 CU ALLOY,OUTER FERRULE,DATA DT</p>	 <p>TE Part # 9-2370714-1 CU ALLOY,SHIELD ASSY,CONN HSG, DATA DT</p>	

Documents



Product Drawings

SWS,HSD,CVTY DIA,RECTANGULAR

English

CAD Files

Customer View Model

ENG_CVM_CVM_9-2367346-1_B1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_9-2367346-1_B1.3d_igs.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_9-2367346-1_B1.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English