70-750EL8-1

Socket, SE Relays general purpose relay accessory, DPDT, 16A, 300V, 8 pins, lift terminals, lock plastic clip, 750R

Green Premium™

Main

Product Range	Legacy
Product Type	Socket
Product Compatibility	Relay 750XBXR Suppressor module 70-ASMM Diode 70-ASMD Signalling device 70-ASMLG Suppressor module 70-ASMR Jumper wire 16-750CBJ-1
Number of Terminals	8
Switch Function	DPDT
Contact Composition	2 NO + 2 NC

Complementary

Rated Current	16 A
[Ue] rated operational voltage	300 V
Contact Terminal Arrangement	Separate
Connections Terminals	Lift terminals flexible Lift terminals solid
Tightening Torque	< 0.8 N.m
Fixing Mode	By screw M3.5, M3.5 panel Clip-on 35 mm DIN rail
Shape of Screw Head	Combination roundhead
Product Weight	2.79 oz (79 g)
Width	1.42 in (36 mm)
Depth	2.24 in (57 mm)

Environment

Ambient Air Temperature for Storage	-40…221 °F (-40…105 °C)
Ambient Air Temperature for Operation	-40…131 °F (-40…55 °C)
IP Degree of Protection	IP20
Flame Retardance	UL94-V0
Product Certifications	UL[RETURN]CSA[RETURN]CE

Ordering and shipping details

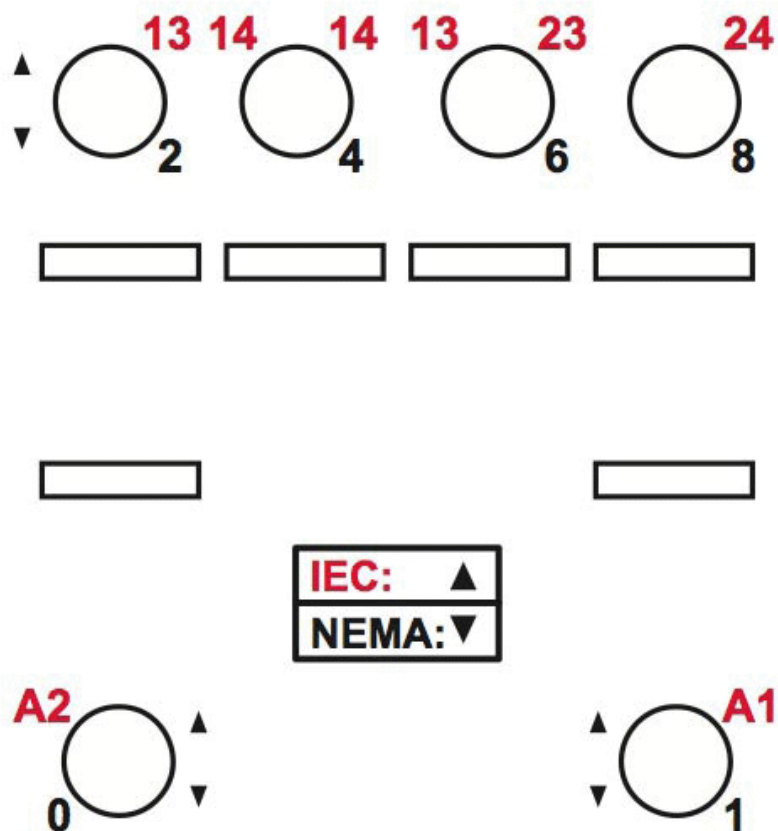|	
Category	US10CP221128
Discount Schedule	0CP2
GTIN	3606480278044
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.90 in (4.826 cm)
Package 1 Width	1.50 in (3.81 cm)
Package 1 Length	3.80 in (9.652 cm)
Package 1 Weight	2.40 oz (68.04 g)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Connections and Wiring Diagrams

Connections and Wiring Diagrams

22 11 12
(5) (1) (4)
24 21 14
(6) (8) (3)

⑤   ④
⑥   ③
⑦   ②
   ⑧   ①

MODULE
INPUT

Coil Jumper Buss
(7)   INPUT   (2)
A2   A1
     NEMA
     IEC