



50 Ohm TNC Female to 75 Ohm F Male Matching
Pad Operating from DC to 3 GHz

Matching Pads Technical Data Sheet

PE70MP1111

Features

- DC to 3 GHz Frequency Range
- Low VSWR < 1.25:1
- 0.5 W Max Power (CW)

Applications

- CATV / Cable Networks
- Communication Systems
- Test and Measurement
- Wireless Systems

Description

Pasternack's PE70MP1111 is a 50 ohm TNC female to 75 ohm F male matching pad that operates from DC to 3 GHz. This TNC to F impedance matching pad offers a low VSWR of 1.25:1 max and attenuation of 7.5 dB max. PE70MP1111 50 ohm to 75 ohm minimum loss pad has a maximum CW power rating of 0.5 Watt. Matching pads are used to match the different impedance between two devices, maximizing power transfer between the two impedances. Pasternack's minimum loss impedance matching pads are available in various connector combinations to fit your needs, all of which ship the same day.

Configuration

Connector 1 50 Ohms TNC Female
Connector 2 75 Ohms F Male

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR		1.15:1	1.25:1	
Attenuation		4	7.5	dB
Input Power (CW)			0.5	Watts

Electrical Specification Notes:

Impedance Matching Pads are resistive devices and are not designed as DC Pass or DC Block circuits

Mechanical Specifications

Size	
Length	2.16 in [54.86 mm]
Width	0.57 in [14.48 mm]
Height	0.57 in [14.48 mm]
Weight	0.04 lbs [18.14 g]
Housing Material and Plating	Brass, Tri-Metal

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm TNC Female to 75 Ohm F Male Matching Pad Operating from DC to 3 GHz PE70MP1111](#)



50 Ohm TNC Female to 75 Ohm F Male Matching
Pad Operating from DC to 3 GHz

Matching Pads Technical Data Sheet

PE70MP1111

Connectors

Description	Connector 1	Connector 2
Type	TNC Female	F Male
Impedance	50 Ohms	75 Ohms
Inner Conductor Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

50 Ohm TNC Female to 75 Ohm F Male Matching Pad Operating from DC to 3 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm TNC Female to 75 Ohm F Male Matching Pad Operating from DC to 3 GHz PE70MP1111](#)

URL: <https://www.pasternack.com/tnc-f-matching-pad-3-mhz-pe70mp1111-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE70MP1111 CAD Drawing

50 Ohm TNC Female to 75 Ohm F Male Matching Pad Operating from DC to 3 GHz

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4


5

6

3

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	3/31/2023	KDANG	SPONG

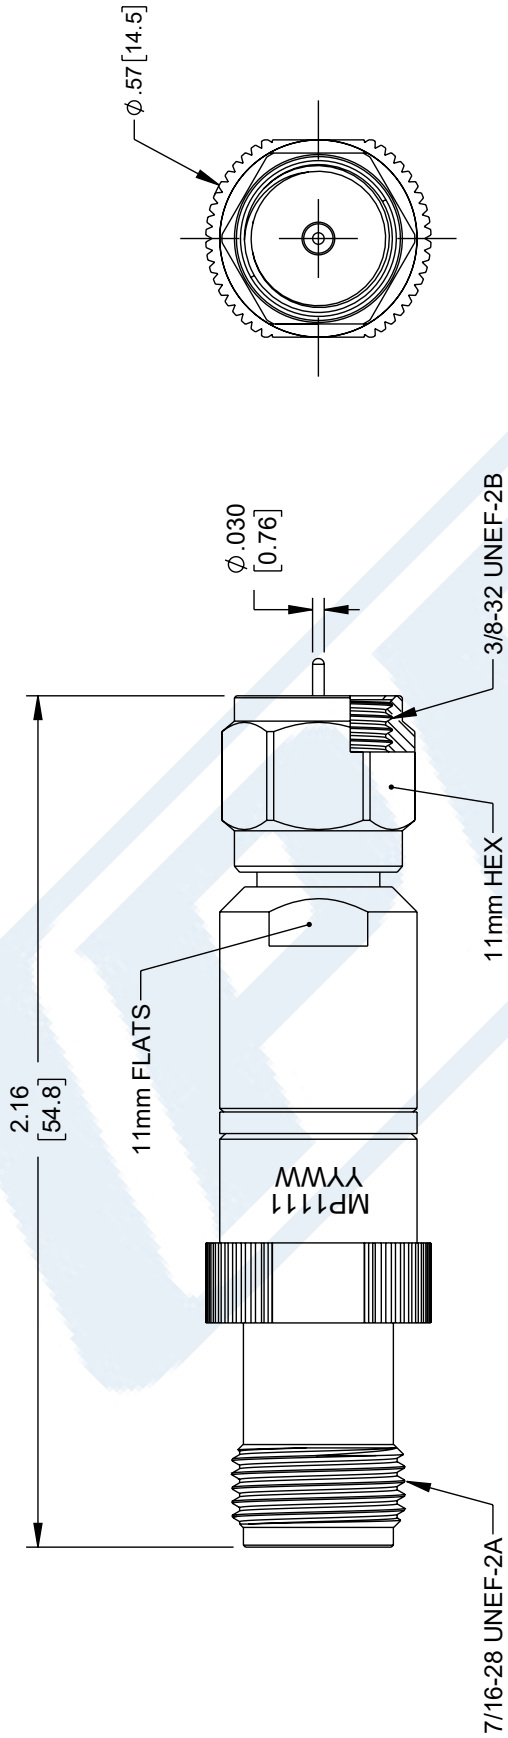

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [.5] ±.132
.XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤ 12 [305] = ±.125 [-0]
> 12 [305] ≤ 60 [1524] = ±.25 [-0]
> 60 [1524] ≤ 120 [3048] = ±.5 [-0]
> 120 [3048] ≤ 300 [7620] = ±.75 [-0]
> 300 [7620] = ±1.5 [-0]

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE

PE PASTERNAK
an INFINITI® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

50ohm TNC Female to 75ohm F Male matching pad 3Ghz
VSWR1.25

INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE NONE

SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev.D2