



Type N Female to Male Precision Calibration Kit Component Thru Operating from DC to 18 GHz

Calibration Kits Components Technical Data Sheet

PE91422

Features

- Precision Controlled Impedance
- Controlled Electrical Length
- Ultra Low VSWR
- Replaces Existing Calibrating Kit Components
- Serial Numbers on Shorts, Opens and Loads
- In Stock and Ready to Ship

Applications

- Vector Network Analyzer Calibration
- SOLT or OSLT Calibration
- Device Characterization
- De-embedding
- Precision Calibrating Kits

Description

Pasternack's PE91422 N female to male precision thru is part of our full line of RF components available for same-day shipping. This N, precision thru is suitable for calibrating on most network and site analyzers. The controlled impedance and electrical length of this component support calibrations through the entire frequency range of the precision connector interface.

Our N female to male precision thru datasheet, specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave components allow designers to configure and customize their test solutions however they like. Whether the need is to provide precise SOLT / OSLT network analyzer calibrations or calibration kit replacement, Pasternack can ship you the right components same day.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|------------------|---------|---------|---------|-------|
| Frequency Range | DC | | 18 | GHz |
| Impedance | | 50 | | Ohms |
| VSWR | | | 1.09:1 | |
| Electrical Delay | | 223 | | ps |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------|---------|---------|----------|----|----|-------|
| Frequency Range | DC to 4 | 4 to 10 | 10 to 18 | | | GHz |
| VSWR, Max | 1.03:1 | 1.05:1 | 1.09:1 | | | |

Electrical Specification Notes:
Values at 25° sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Type N Female to Male Precision Calibration Kit Component Thru Operating from DC to 18 GHz PE91422](#)



Type N Female to Male Precision Calibration Kit
Component Thru Operating from DC to 18 GHz

Calibration Kits Components Technical Data Sheet

PE91422

Mechanical Specifications

Size

| | |
|----------------|-------------------|
| Length | 2.9 in [73.66 mm] |
| Width/Diameter | 0.87 in [22.1 mm] |
| Pin Depth | 0.204 to 0.21 in |

Connector 1

| | |
|---------------------------|-----------------|
| Connector Type | N Female |
| Body Material and Plating | Stainless Steel |

Connector 2

| | |
|-------------------------------------|-----------------|
| Connector Type | N Male |
| Connector Body Material and Plating | Stainless Steel |

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Type N Female to Male Precision Calibration Kit Component Thru Operating from DC to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Type N Female to Male Precision Calibration Kit Component Thru Operating from DC to 18 GHz PE91422](#)

URL: <https://www.pasternack.com/type-n-female-calibration-kit-component-thru-18-ghz-pe91422-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE91422 CAD Drawing

Type N Female to Male Precision Calibration Kit Component
Thru Operating from DC to 18 GHz

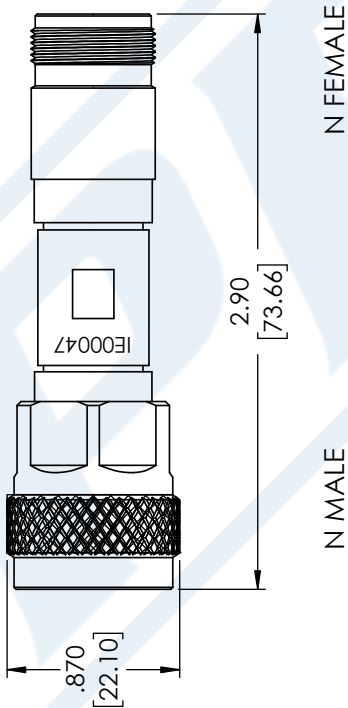

| STANDARD TOLERANCES | |
|---------------------|--------|
| .X | ±0.2 |
| .XX | ±0.01 |
| .XXX | ±0.005 |

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

**PASTERNAK**[®]
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

| | |
|-----------|---------|
| DWG TITLE | PE91422 |
| CAGE CODE | 53919 |

| | | | | | | | |
|---|----------|----------|-------|-----|------|---|--------|
| NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | CAD FILE | 01/26/18 | SCALE | N/A | SIZE | A | CN2245 |
|---|----------|----------|-------|-----|------|---|--------|