

SENCITY® Rail Antenna
87010009

Properties

- Railway rooftop multiband antenna for 430-470 MHz and 870-960 MHz
- The antenna can be operated in all frequency ranges simultaneously
- Multiple Antenna installations support Cellular MIMO
- Rugged design, meets EN 50155 Railway Standard
- Fire retardant acc. to EN 45545-2
- Works also on non-metallic surfaces



Electrical bands		
	Band 1	Band 2
Frequency	430 MHz ... 470 MHz	870 MHz ... 960 MHz
VSWR	1.5	1.5
Impedance	50 Ω	50 Ω
Gain	3.5 dBi	4.5 dBi
Ambient Temperature	25 °C	25 °C

Electrical remarks	
Remarks	Indicated VSWR values are valid for a metallic ground plane of 1M x 2M or larger

Ports	
	Port 1
Port name	Tetra/Cell
Connector	N, jack (female)
Polarization	vertical
DC grounded	Yes

SENCITY® Rail Antenna

87010009

Connections	
Port number	Port 1
Band 1	✓
Band 2	✓

Mechanical data	
Weight	0.5 kg
Dimensions	150 mm x 145 mm x 85 mm (Height x Width x Depth)
Remarks	Packaging size (outside): 150 x 90 x 190 mm
	Radiator: Copper and brass.
	Flange: Aluminum.
	All screws and nuts: Stainless steel. Sealing: Neoprene and silicon

Interface and material data	
Radome material	Fiberglass
Radome colour	Grey
Back plate/base plate material	Aluminum
Back plate/base plate colour	Black


Environmental data	
Operation temperature	-40 °C ... 85 °C
Storage temperature	-40 °C ... 85 °C
Environment (application)	Outdoor
Ingress protection (IP Rating)	Mated / IP66
Flammability rating	EN 45545-2

Environmental remarks
Environmental tests: EN 50155:2018-05

Additional Information
This antenna, tested by an independent institute, is DC grounded to protect against lightning and short circuit with high voltage lines.

SENCITY® Rail Antenna
87010009

Outline drawing

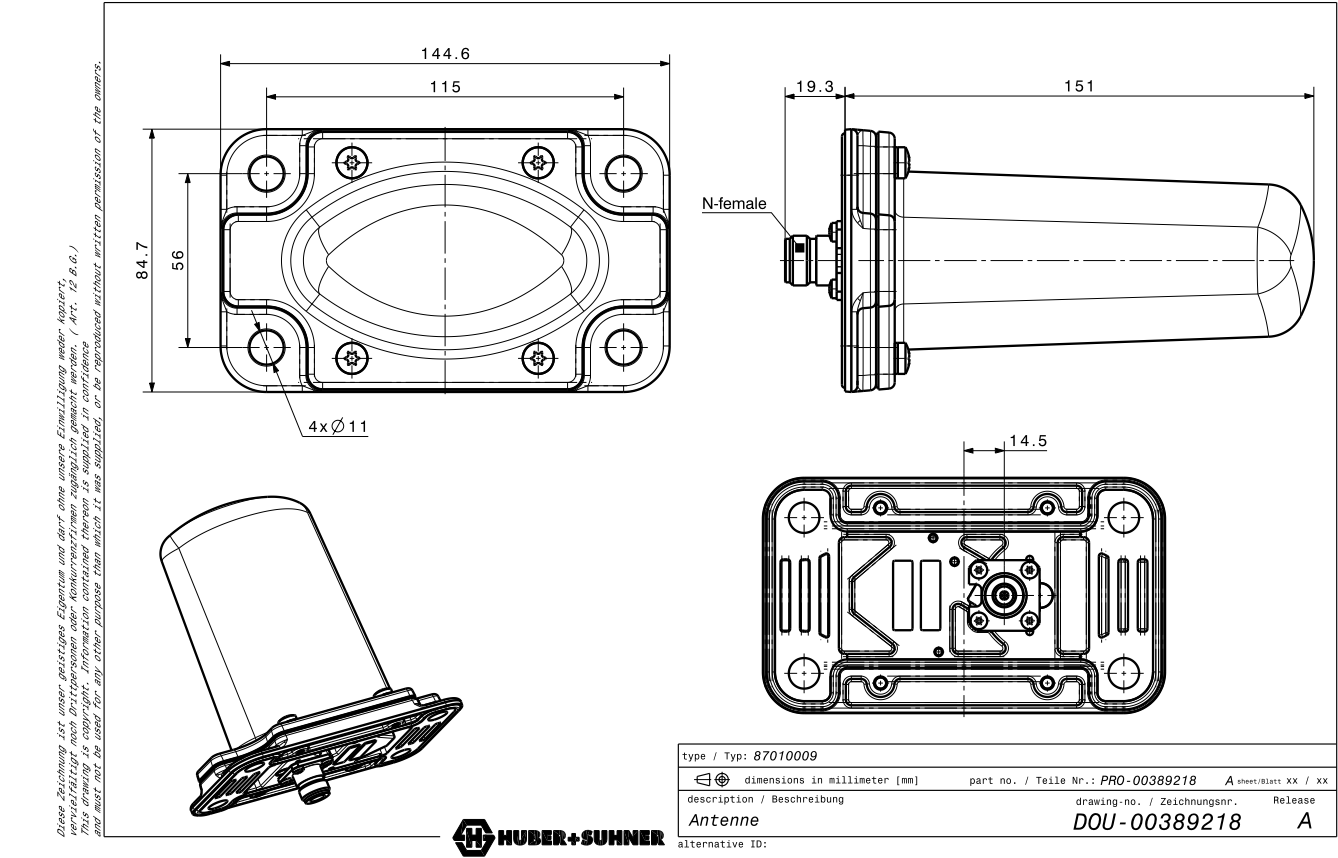

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/ EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-PI234 / Date of publication: 10.06.2024 / uncontrolled copy