



Bandpass Waveguide Filter With WR-42 Interface
And a Pass Band From 20.2 GHz to 21.2 GHz

TECHNICAL DATA SHEET

PE-W42F001

Configuration

Passband	Band Pass
Number of Sections	5
Connector 1	WR-42
Connector 2	WR-42

Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Passband Frequency Range	20.2	-	21.2	GHz
Passband VSWR			1.5:1	
Rejection at 19.2 GHz	40			dB
Rejection at 22.8 GHz	40			dB

Mechanical Specifications

Size

Length	2.62 in [66.55 mm]
Width	0.88 in [22.35 mm]
Height	0.88 in [22.35 mm]

Connector 1

Type	WR-42
------	-------

Connector 2

Type	WR-42
------	-------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

- Values at 25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bandpass Waveguide Filter With WR-42 Interface And a Pass Band From 20.2 GHz to 21.2 GHz PE-W42F001](#)




Bandpass Waveguide Filter With WR-42 Interface
And a Pass Band From 20.2 GHz to 21.2 GHz

TECHNICAL DATA SHEET

PE-W42F001

Outline Drawing

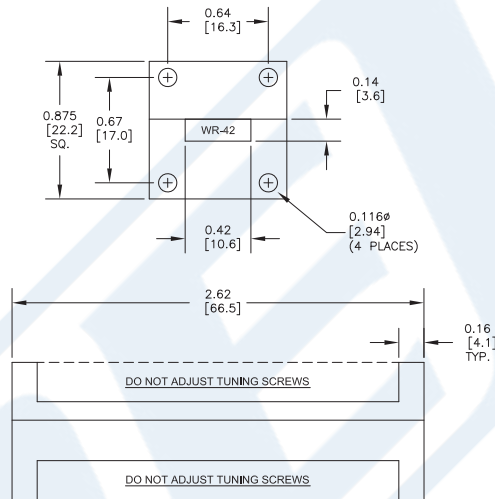

Bandpass Waveguide Filter With WR-42 Interface And a Pass Band From 20.2 GHz to 21.2 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bandpass Waveguide Filter With WR-42 Interface And a Pass Band From 20.2 GHz to 21.2 GHz PE-W42F001](http://www.pasternack.com/bandpass-waveguide-filter-wr-42-pass-band-20.2-21.2-ghz-pe-w42f001-p.aspx)

URL: <http://www.pasternack.com/bandpass-waveguide-filter-wr-42-pass-band-20.2-21.2-ghz-pe-w42f001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.