

## SMA Frequency Divider Divide by 20 Prescaler Module Operating from 100 MHz to 13 GHz

The FMFD20000 is a coaxial packaged Frequency Divider module that operates across a wide input frequency range from 100 MHz to 13 GHz and supports a divide ratio of 20. Output Frequency is 5 MHz to 650 MHz. Impressive broadband typical performance of this Prescaler includes output power of -1 dBm and SSB phase noise of -145 dBc/Hz at 100 kHz offset. This exceptional technical performance is achieved through the use of a hybrid MIC PCB solder assembly which is RoHS and REACH compliant. This frequency divider design requires +12 Vdc typical bias voltage, operates over maximum temperature range of -40°C to +85°C, and has an absolute maximum rating for input power of +13 dBm. The rugged and compact package supports SMA Female connectors, RFI and Ground Pins. For highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for Humidity, Shock, Vibration, and Altitude.

### Electrical Specifications (TA= 25°C, Vd1 = 12 Vdc, Id1 = 195 mA)

Description	Min	Typ	Max	Units
Input Frequency (Sine Wave)	0.1		13	GHz
Output Frequency (Square Wave Output)	5		650	MHz
Output Power	-4	-1		dBm
Phase Noise @100kHz Offset		-145		dBc/Hz
Operating DC Voltage 1	7	12	15	V
Operating DC Current 1		195		mA

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	0.1 to 1	1 to 10	10 to 12	12 to 12.5		GHz
Input Power (CW), Max	10	10	3	3		dBm
Input Power (CW), Typ	-6	-20	-15	-8		dBm
Input Power (CW), Min	-1	-15	-10	-5		dBm

### Mechanical Specifications

Size	
Length	1.25 in [31.75 mm]
Width	1.25 in [31.75 mm]
Height	0.563 in [14.3 mm]
Output Connector	SMA Female

### Environmental Specifications

Temperature	
Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C
Humidity	MIL-STD-202F, Method 103B, Condition B
Shock	MIL-STD-202F, Method 213B, Condition B
Vibration	MIL-STD-202F, Method 204D, Condition B



### Features:

- Wide Input Frequency Range: 100 MHz to 13 GHz
- Divide-by-20 Prescaler
- Output Frequency 5 MHz to 650 MHz
- Output Power: -1 dBm typical
- Low SSB Phase Noise: -145 dBc/Hz @ 100 KHz offset typical
- RoHS & REACH Compliant Assembly
- Bias Voltage: +12 Vdc
- Operational Temperature Range: -40°C to +85°C
- Compact SMA Connectorized Package
- Designed to meet MIL-STD-202 Test Conditions

### Applications:

- PLL Applications
- Test Instrumentation
- Countermeasures
- Point to Point Microwave Radio
- SATCOM
- MILCOM
- Base Stations

Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

Altitude


MIL-STD-202F, Method 105C, Condition B

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**Typical Performance Data**

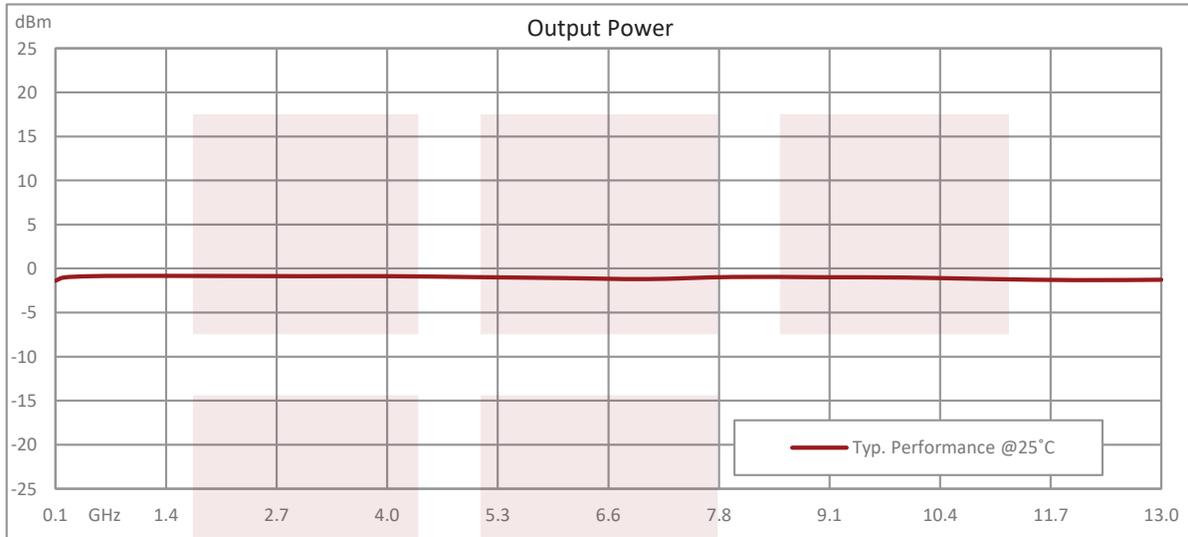


SMA Frequency Divider Divide by 20 Prescaler Module Operating from 100 MHz to 13 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA Frequency Divider Divide by 20 Prescaler Module Operating from 100 MHz to 13 GHz FMFD20000](#)

URL: <https://www.fairviewmicrowave.com/sma-frequency-divider-divide-20-prescaler-module-100-mhz-13-ghz-fmfd20000-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

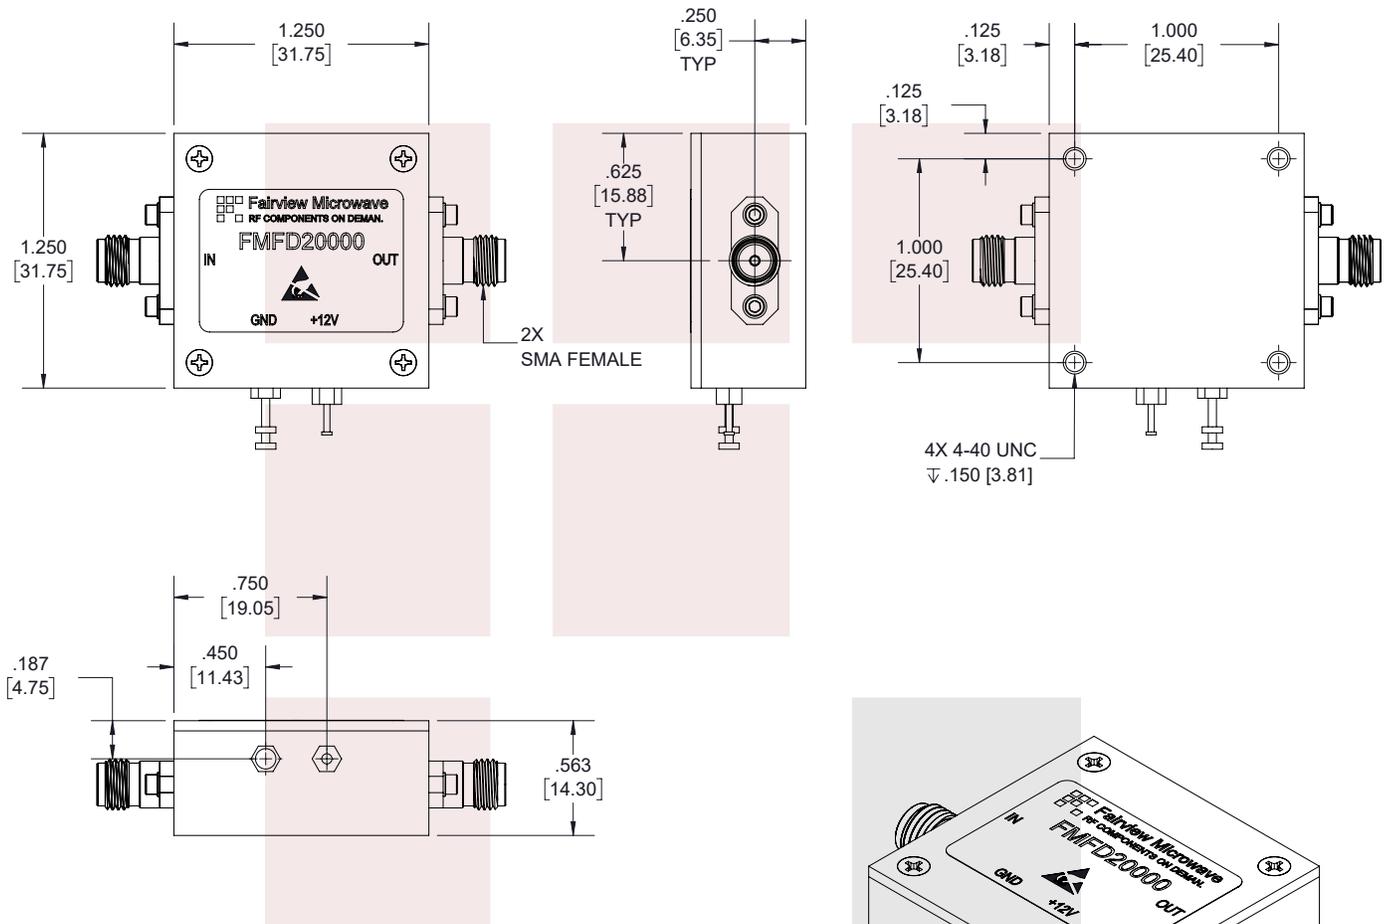

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

Fairview Microwave an INFINITE brand		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].	
TITLE SMA Frequency Divider Divide by 20 Prescaler Module Operating from 100 MHz to 13 GHz		DWG NO FMFD20000	CAGE CODE 3FKR5
CAD FILE	04/26/18	SHEET	1 OF 1
SCALE	N/A	SIZE	A
		7361	