




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

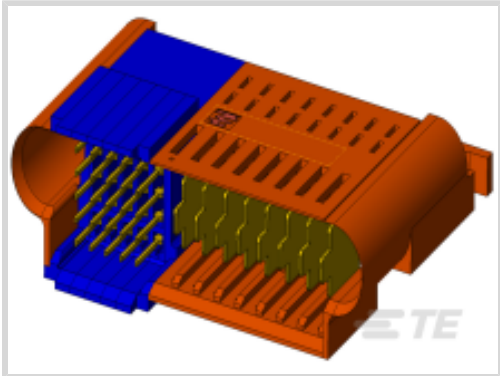

Rectangular Power Connector Type: **Connector Assembly**

Connector & Housing Type: **Plug**

Connector System: **Board-to-Board**

Number of Positions: **33**

Centerline (Pitch): **2 mm, 2.75 mm [.07 in, .108 in]**

Features

Product Type Features

Header Type	Fully Shrouded
Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Plug
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	33
PCB Mount Orientation	Right Angle
Number of Power Positions	8
Number of Signal Positions	25
Number of Rows	1, 5
Board-to-Board Configuration	Co-Planar, Perpendicular

Electrical Characteristics

Operating Voltage	60 VDC
-------------------	--------

Contact Features

Power Contact Base Material	Copper Alloy
Signal Contact Base Material	Phosphor Bronze



Contact Layout	Inline, Matrix
Contact Mating Area Plating Material	Gold, Gold Flash over Palladium Nickel
Contact Underplating Material	Nickel
Contact Current Rating (Max)	17 A
Contact Retention Within Housing	With
Contact Type	Blade, Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.08 µm, .76 µm[3.302 µin][30 µin]

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Press-Fit
---	--------------------------

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Centerline (Pitch)	2 mm, 2.75 mm [.07 in][.108 in]
Housing Color	Black
Housing Material	LCP-GF (Liquid Crystal Polymer)

Dimensions

Row-to-Row Spacing	2 mm [.079 in]
--------------------	----------------

Usage Conditions

Operating Temperature Range	-40 – 125 °C
-----------------------------	--------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	UL
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Tray
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1-1926739-8
AssyMinipak Hdl25s8pRAREcptSc

Customers Also Bought

TE Part #ZPF00000000136485
RECEPTACLE MALE FOR 12 PINS, CAL1,6

TE Part #EC9833-000
ZHD-SCE-3.2-50-S1-4

TE Part #1-1415543-5
RTE44110

TE Part #ASA158F12390235000
623 PLUG





TE Part #ZPF00000000205373
PLUG MALE ANG.90 CAL.20 - FXP



TE Part #YZ-KC-212751A-PY00
TOOL DISMOUNTING - FXP2



TE Part #55992-1
TERMINAL,AMPOWER R 2/0 5/16



TE Part #ZPF00000000205378
CONTACT MALE ANG.90, CAL20,
120MM2 - FXP



TE Part #ZPF00000000205388
CONTACT FEMALE CAL.20, M12 - FXP

Documents

Product Drawings

AssyMINIPAKHDL25s8pRAplugScrew

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1892786-8_2.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1892786-8_2.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1892786-8_2.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English